



T2428100 - Open Frame Transformer

Specification Chart:


Model #	Input (Primary)	Output (Secondary)	Agency Listing
T2428100	115VAC, 50/60Hz (1 amp)	24VAC/100VA (4 amp) or 28VAC/100VA (3.5 amp)	

Installation Instructions:

1. Mount transformer in desired location/enclosure (refer to Transformer Dimensions below).
2. Connect AC power 115VAC, 50/60Hz to primary leads (black and white) (refer to Wiring Configuration below).
3. Measure output voltage across the secondary leads before connecting devices (refer to Wiring Configuration below). This helps avoid potential damage.
 - Yellow and Brown for 24VAC (open circuit voltage @ 115VAC approx. 26.1VAC).
 - Black and Brown for 28VAC (open circuit voltage @ 115VAC approx. 30.4VAC).
4. Connect 24VAC device(s) to Yellow and Brown leads or 28VAC device(s) to Black and Brown leads (refer to Wiring Configuration below).


WARNING: This installation should be made by qualified service personnel and should conform to all local codes and in accordance with the National Electrical Codes.

Wiring Configuration:

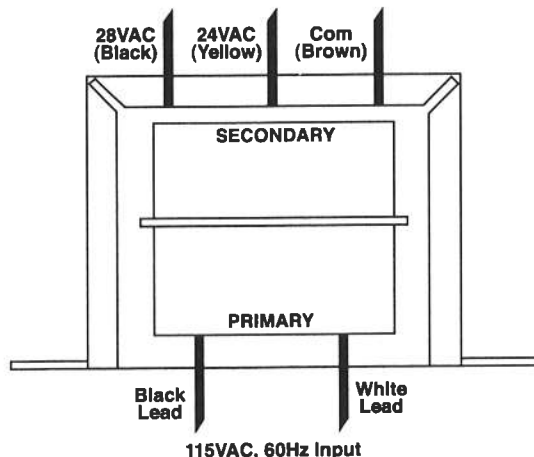

Transformer Dimensions:

Model #	A	B	C	D	E	F	Approx. Ship Wt.
T2428100	3.083"	2.575"	2.47"	1.33"	4.033"	3.576"	3.3 lbs.

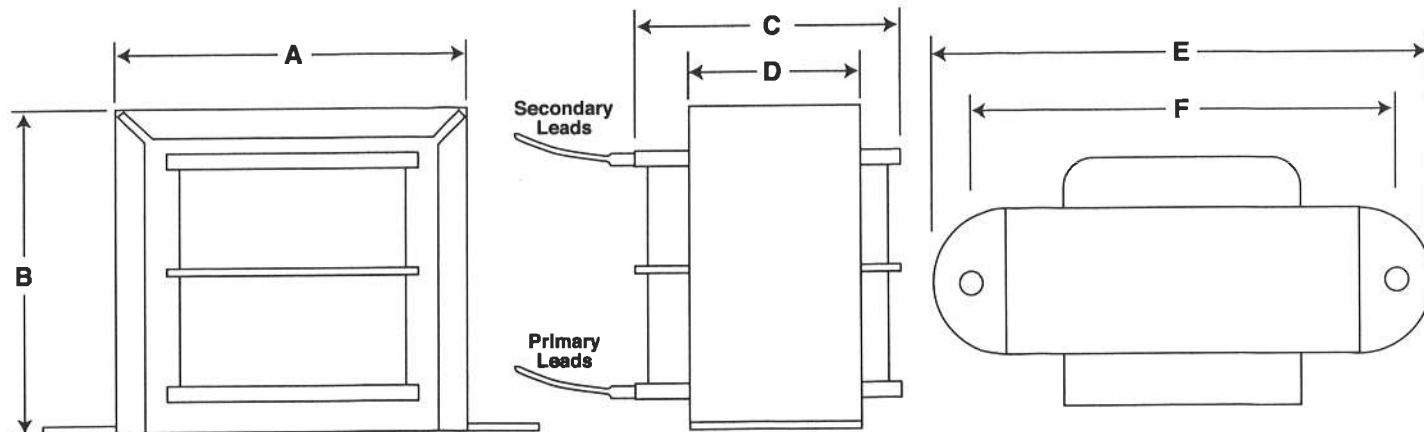

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.

