

# RS2 Technologies

a family of access management hardware solutions

## NCL-SBE



*The NCL-SBE is a rugged, NEMA approved enclosure designed to accommodate a single full-size SCP board. This photo shows the NCL-SBE configured with an EP-1502 controller in an RS2 First Step PLUS System.*



### The NCL-SBE includes these features:

- Rugged 18-gauge steel with gray powder-coated finish (inside & out)
- NEMA approved
- Compact size: 10" (W) x 12" (H) x 4" (D)
- Configured for any one of the following boards: EP-1501, EP-1502, MR-50, MR-51E, MR-52, MR-16IN, MR-16OUT (see Application Note on reverse)
- Screw-on cover
- Mounting hardware pack for access control modules
- Made in the USA

### The RS2 NCL Line of Enclosures

RS2 Technologies has designed the NCL line of enclosures with flexibility and easy installation in mind. They are rugged, 18-gauge steel NEMA approved enclosures that are designed to accommodate multiple board configurations. The NCL and NCL-12 are equipped with male threaded studs designed to accept 1/2" standoffs that facilitate attachment of both large and small boards. Standard RS2 NCL enclosures include the NCL, NCL-12, and SBE models. Other models are available by special order (contact your Regional Sales Manager).

**Dimensions:**

10" (W) x 12" (H) x 4" (D)  
 (254 mm x 305 mm x 102 mm)  
 Note: 4.049" (103 mm) (D) with cover

**Material:**

18-gauge powder-coated steel


**Standards:**

NEMA approved

**Application Note:**

The NCL-SBE comes equipped with a screw-on cover and mounting hardware. It can accommodate any (one) of the following boards (with First Step PLUS Kit Model # indicated in parentheses): EP-1501 (FS1RE-PLUS), EP-1502 (FS2RE-PLUS), MR-50 (FS1RAO-PLUS), MR-51E (FS1REAO-PLUS), MR-52 (FS2RAO-PLUS), MR-16IN (FS16IAO-PLUS), MR-16OUT (FS16OAO-PLUS). It also has a rechargeable 1.2 Ah 12 V battery (lead acid), and a 1 amp linear power supply/battery charger.

*For more information, please contact:*

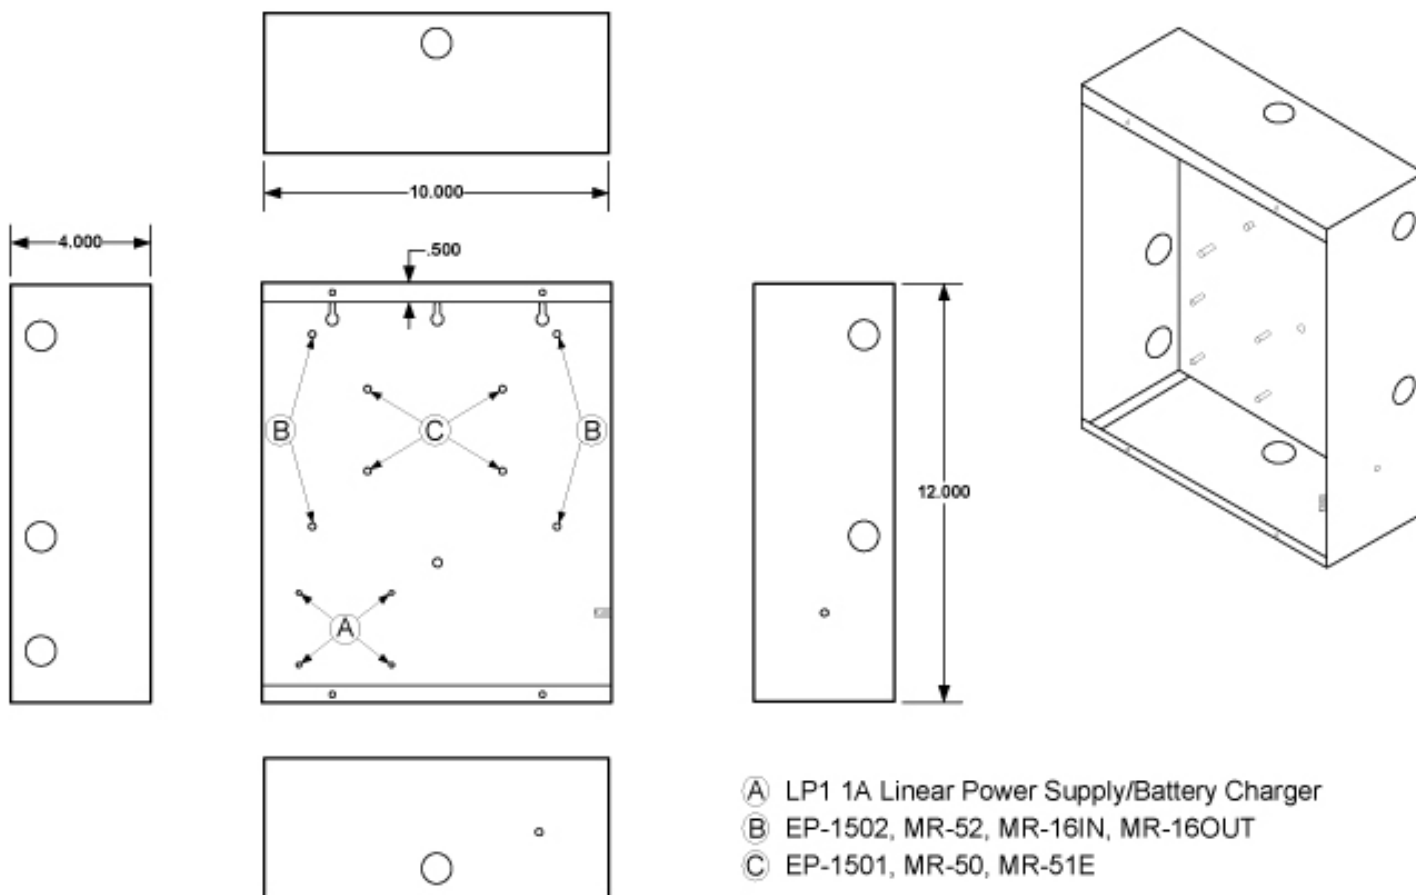

- (A) LP1 1A Linear Power Supply/Battery Charger
- (B) EP-1502, MR-52, MR-16IN, MR-16OUT
- (C) EP-1501, MR-50, MR-51E